


# MYC-YM62X System-On-Module Overview




- ✓ TI AM62x Processor based on up to 1.4GHz Quad ARM Cortex-A53 and 400MHz Cortex-M4F Cores
- ✓ 1GB/2GB DDR4, 8GB eMMC Flash, 32KB EEPROM
- ✓ Power Management IC (TPS6521901)
- ✓ 1.0mm pitch 164-pin Castellated-Hole and 58-pin LGA Expansion Interfaces
- ✓ Supports Running Linux 6.1 OS
- ✓ Supports Working Temperature Ranging from -40 to 85 Celsius



Measuring only 43mm by 45mm, the MYC-YM62X is a compact System-on Module (SoM) based on TI AM623 and TI AM625 microprocessors which among the TI Sitara AM62x MPU family and feature up to 1.4GHz Quad ARM Cortex-A53 and 400MHz Cortex-M4F cores, dual-display support and 3D graphics acceleration, along with an extensive set of peripherals such as dual TSN-enabled Gigabit Ethernet ports, USB, MMC/SD, Camera interface, OSPI, CAN-FD and GPMC for parallel host interface to an external ASIC/FPGA. In addition to the AM62x processor, the MYC-YM62X has integrated 1GB/2GB DDR4, 8GB eMMC, 32Kbit EEPROM and power management IC (PMIC). A variety of peripheral and IO signals are accessible via the the 1.0 mm pitch 164-pin Castellated-Hole and 58-pin LGA Expansion Interfaces. With the excellent control and communication capabilities, the tiny module is well-suited for a broad range of industrial and display applications such as HMI, PLC, medical, EV charging stations, automation control or a monitor system.

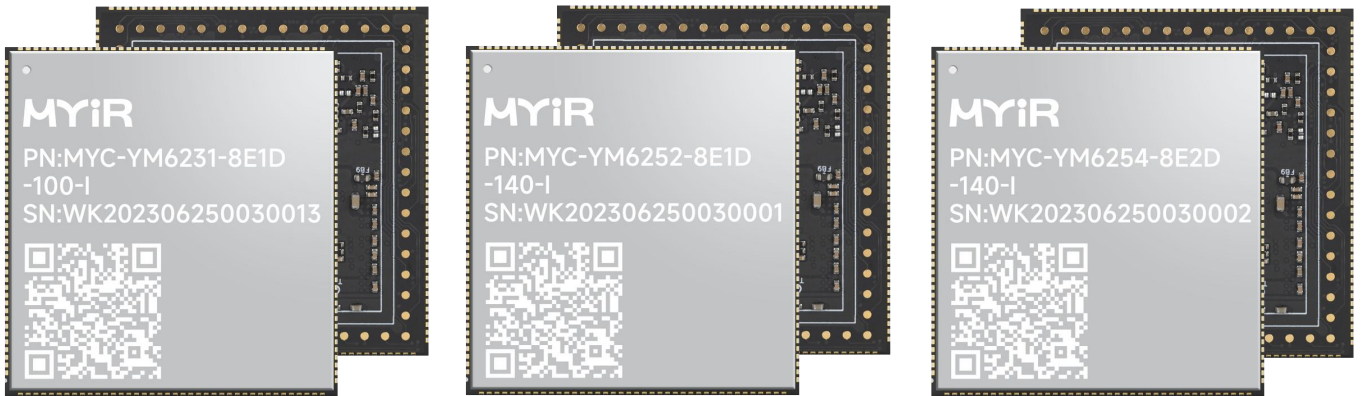

MYC-YM62X (MYC-YM6231 / MYC-YM6252 / MYC-YM6254)

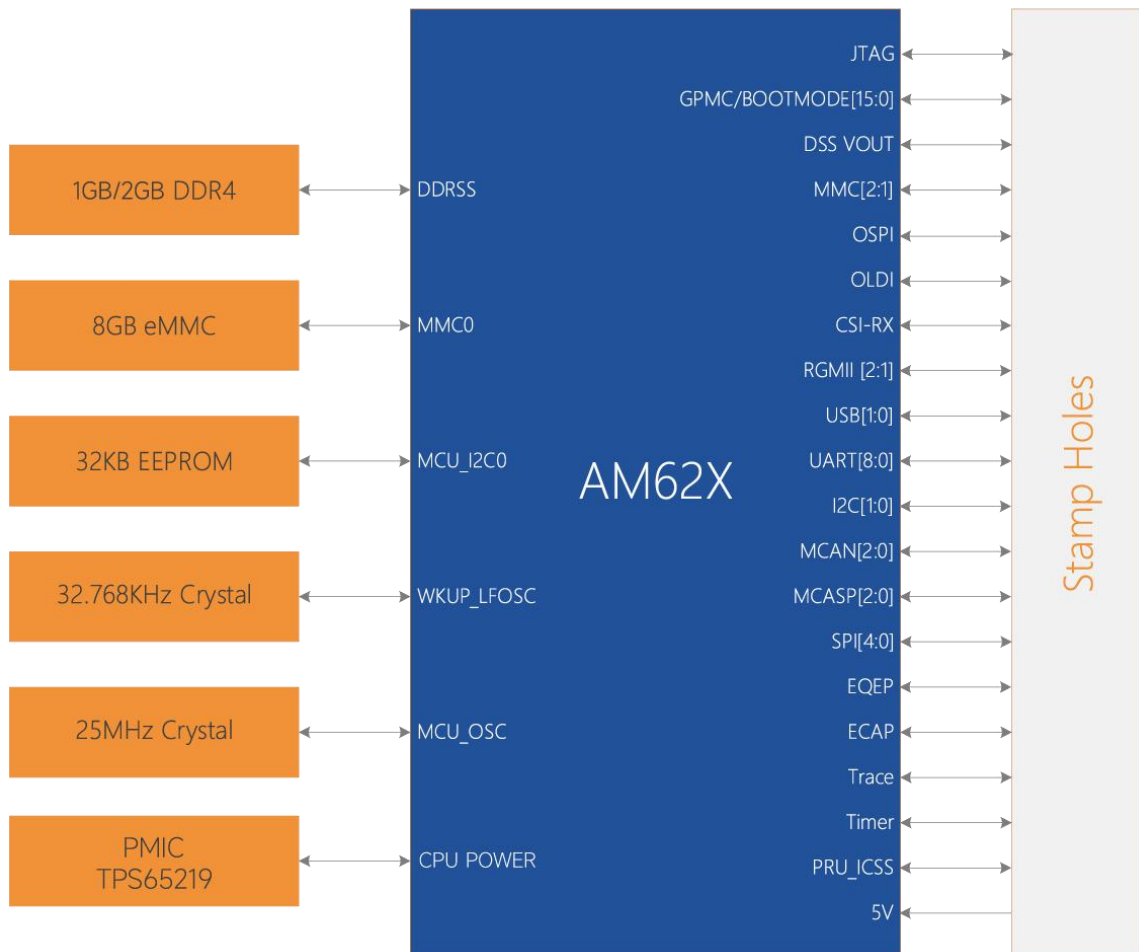


MYC-YM62X Function Block Diagram




MYIR provides complete software package for Linux 6.1 running on the MYC-YM62X to help users launch their development quickly and easily.

The MYD-YM62X Development Board is built around the MYC-YM62X SOM to serve as a complete development platform for evaluation or prototype purposes. Its base board provides rich communication interfaces such as dual RS485, dual CAN, dual Gigabit Ethernet, dual USB Host and one OTG, one USB based 5G/4G module interface, one WiFi/BT module and one GPMC external memory bus. The board has also explored advanced multi-media capabilities of AM62x to support dual LVDS display, audio and camera as well as HDMI display support via a RGB conversion chip. MYIR offers MY-CAM003M MIPI Camera Module and MY-LVDS070C LCD Module as options for the MYD-YM62X board which allows customers to acquire better development experience.

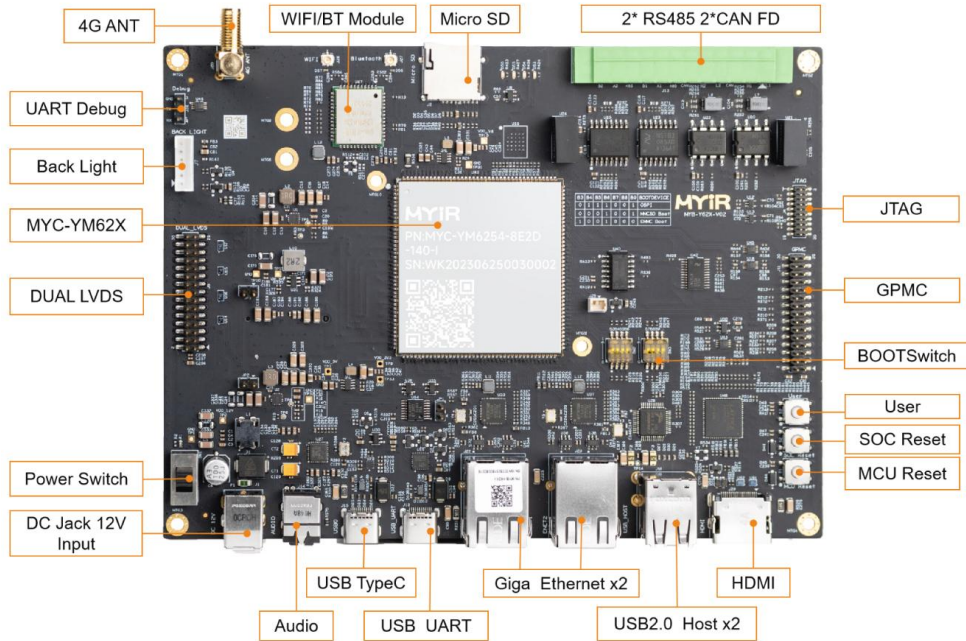

*MYD-YM62X Development Board (Top-view)*

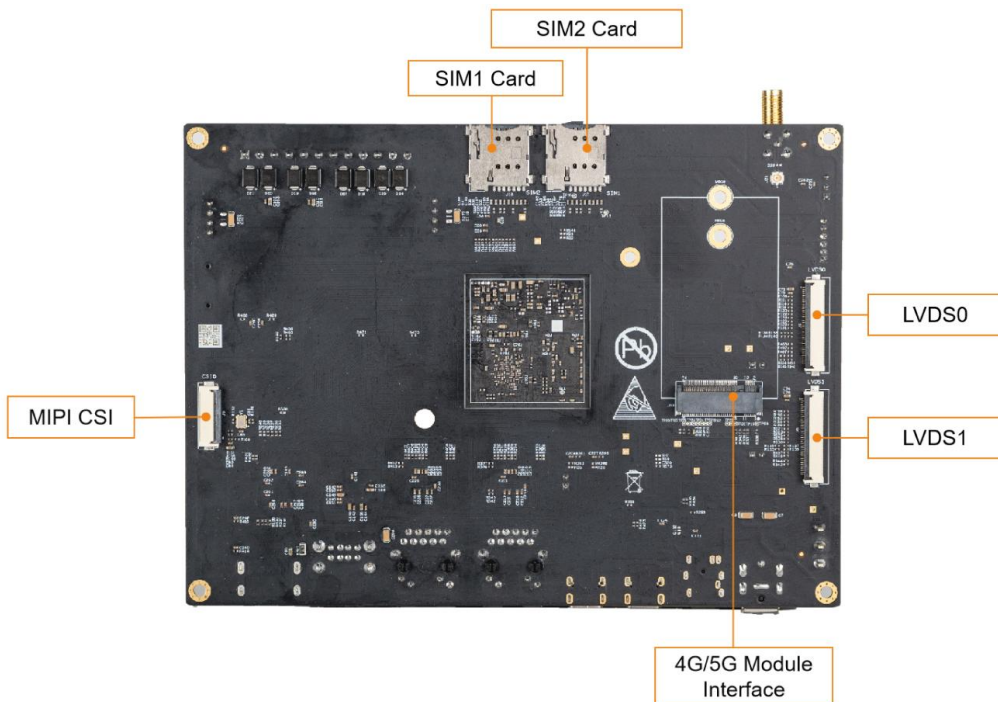

*MYD-YM62X Development Board (Bottom-view)*



## Hardware Specification

The [MYC-YM62X](#) is an SoM solution for TI AM623 and AM625 processors which are among the low-cost AM62x Sitara MPU family built for Linux application development. With scalable Arm Cortex-A53 performance and embedded features, such as: dual-display support and 3D graphics acceleration, along with an extensive set of peripherals that make the AM62x device well-suited for a broad range of industrial and automotive applications while offering intelligent features and optimized power architecture as well.


Some of these applications include:

- Industrial HMI
- EV charging stations
- Touchless building access
- Driver monitoring systems


The [MYC-YM62X](#) is using the 13 x 13mm (ALW) package AM62x processors (AM6254ATCGGAALW, AM6252ATCGGAALW and AM6231ASGGGAALW). The 3-port Gigabit Ethernet switch has one internal port and two external ports with Time-Sensitive Networking (TSN) support. An additional PRU module on the device enables real-time I/O capability for customer’s own use cases. In addition, the extensive set of peripherals included in AM62x enables system-level connectivity, such as: USB, MMC/SD, Camera interface, OSPI, CAN-FD and GPMC for parallel host interface to an external ASIC/FPGA.

Products in the AM62x processor family (13mm x 13mm package size) :


- [AM625](#) – Human-machine Interaction SoC with Arm Cortex-A53 based edge AI and full-HD dual-display
- [AM623](#) – Internet of Things (IoT) and Gateway SoC with Arm Cortex-A53 based object and gesture recognition

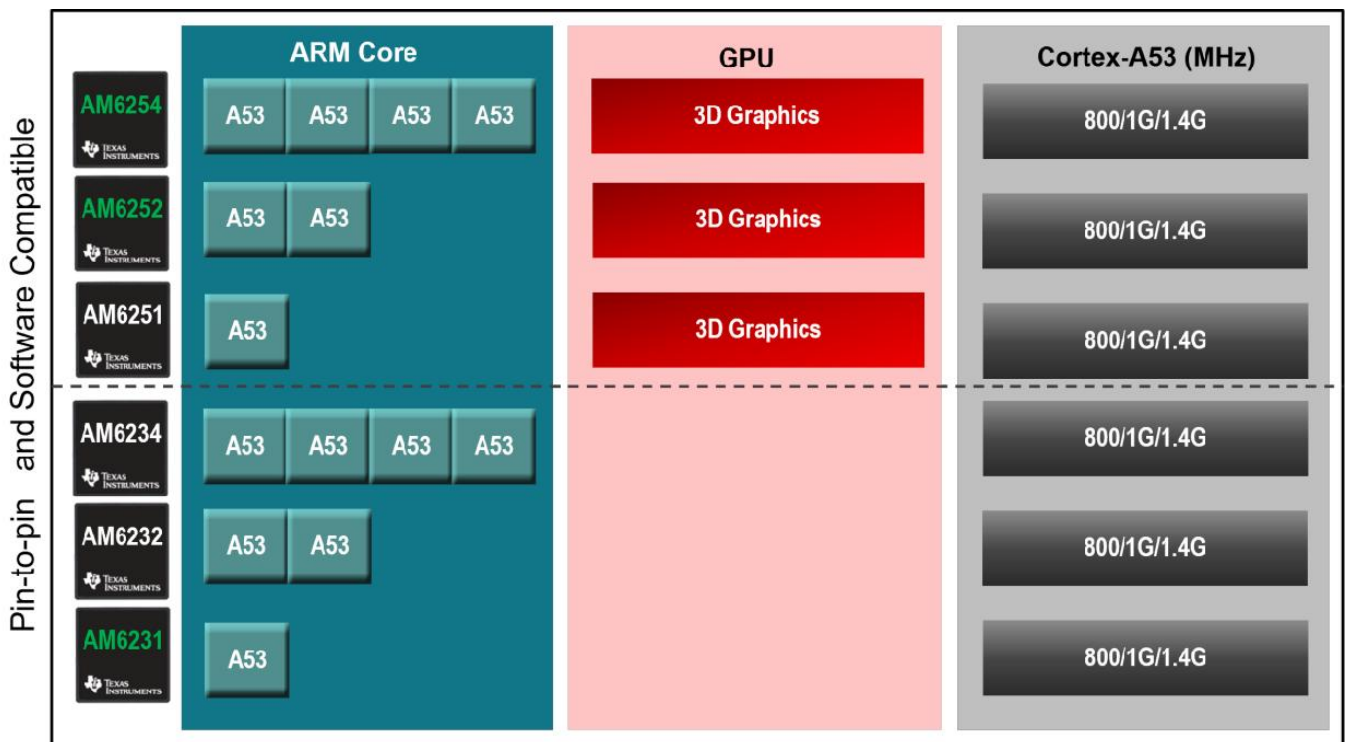

AM62x Devices Comparison

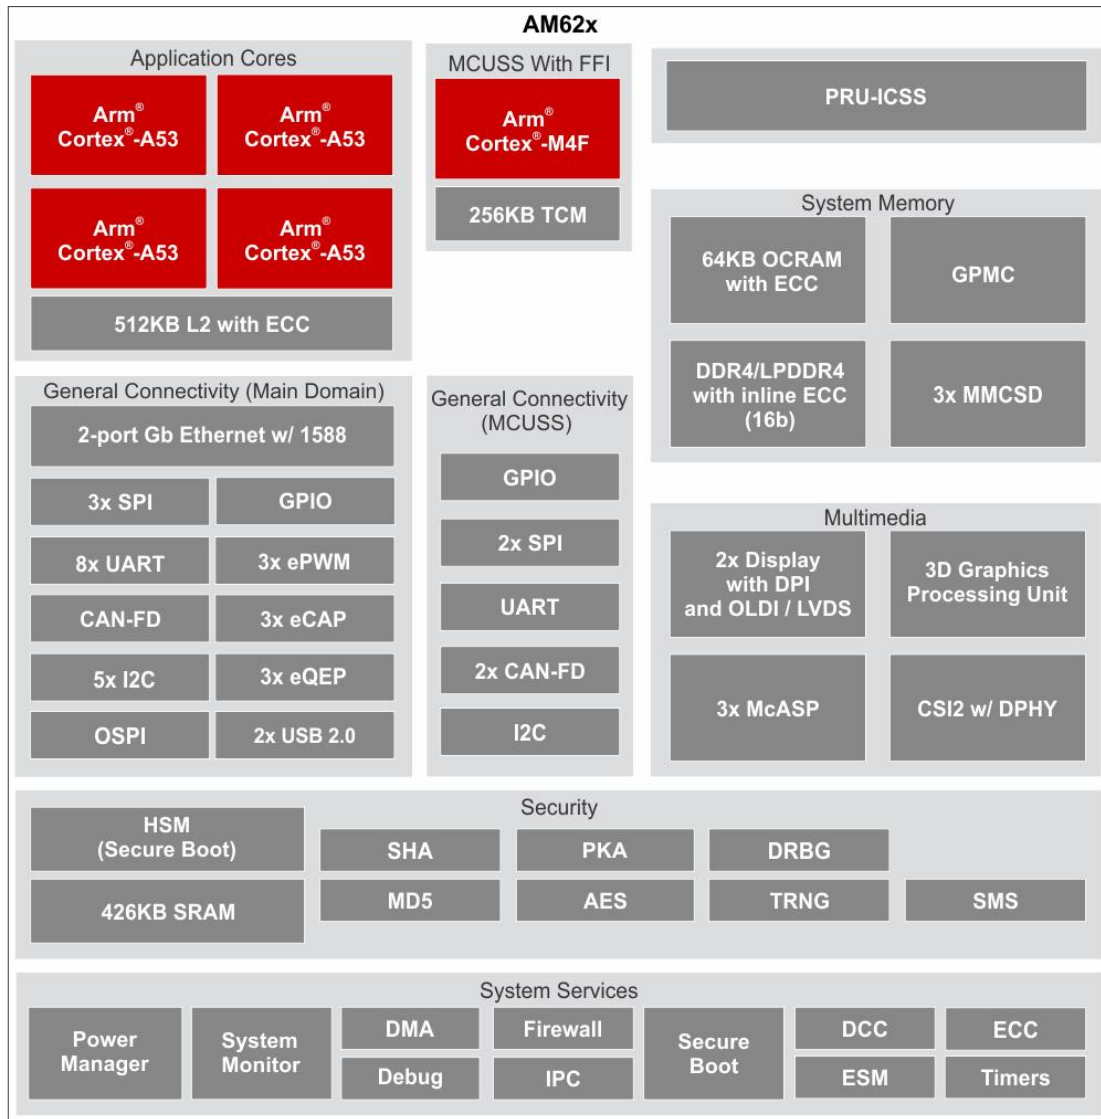

AM62x Block Diagram

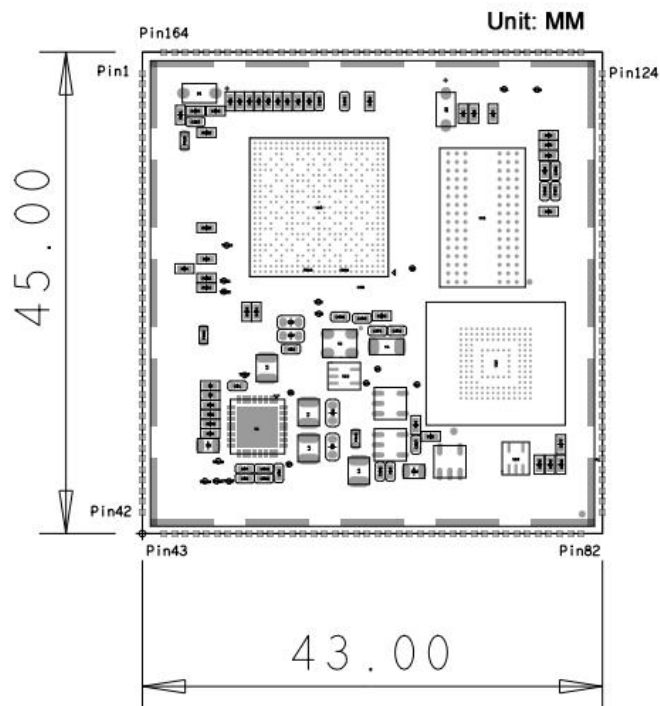

MYC-YM62X Dimensions Chart



The MYC-YM62X takes full features of TI AM62x processor and the main features are characterized as below:

### Mechanical Parameters

- Dimensions: 43mm x 45mm
- PCB Layers: 10-layer design
- Power supply: +5V/1A
- Working temperature: -40~85 Celsius (industrial grade)

### Processor

- TI AM62x processor (AM6254/AM6252/AM6231)
  - TI AM6254: 4\*Cortex-A53@1.4GHz + Cortex-M4F@400MHz (AM6254ATCGGAALW)
  - TI AM6252: 2\*Cortex-A53@1.4GHz + Cortex-M4F@400MHz (AM6252ATCGGAALW)
  - TI AM6231: 1\*Cortex-A53@1.0GHz + Cortex-M4F@400MHz (AM6231ASGGGAALW)
  - Two PRU-SS running up to 333MHz
  - 3D GPU graphics accelerator (only for AM625 processors)

### Memory

- 1GB/2GB DDR4 (supports up to 4GB)
- 8GB eMMC (supports up to 128GB)
- 32KB EEPROM

### Peripherals and Signals Routed to Pins

- Power Management IC (TPS6521901)
- 1.0mm pitch 164-pin Castellated-Hole and 58-pin LGA Expansion Interfaces
  - 2 x RGMII
  - 2 x USB2.0
  - 9 x UART
  - 3 x CAN FD
  - 6 x I2C
  - 5 x SPI
  - 1 x GPMC
  - 2 x LVDS
  - 1 x RGB
  - 1 x MIPI-CSI
  - 3 x MCASP
  - 1 x JTAG
  - Up to 143 x GPIOs

*Note: the peripheral signals brought out to the expansion interface are listed in maximum number. Some signals are reused. Please refer to the processor datasheet and the SOM pinout description file.*



**Software Features**

The MYC-YM62X supports Linux OS and comes with complete software package. The kernel and many peripheral drivers are available in source code to assist clients to expedite their development. The following are a summary of the software features:

Item	Feature	Description	Source code
Bootloader	trusted-firmware-a	Fsbl boot start	YES
	U-boot	Second Boot Program uboot_2023.04	YES
Linux kernel	Linux kernel	Based on the official kernel_6.1.46 version customization	YES
Device driver	PMIC	TPS6521901driver	YES
	OSPI	OSPI driver	YES
	USB Host	USB Host driver	YES
	USB OTG	USB OTG driver	YES
	I2C	I2C bus driver	YES
	SPI	SPI bus driver	YES
	Ethernet	YT8531SH driver	YES
	SDHI	eMMC/SD card storage driver	YES
	HDMI	SII9022ACNU driver	YES
	LVDS	LVDS driver	YES
	Audio	SGTL5000 audio driver	YES
	4G/5G	4G/5G driver	YES
	PWM	PWM control	YES
	ADC	ADC driver	YES
	RTC	RTC driver	YES
	GPIO	Universal GPIO driver	YES
	UART	RS485/TTL driver	YES
	CAN	CAN driver	YES
Camera (MIPI)	OV5640 camera driver	YES	
WiFi/BT	FGL297BSRX-00 driver	YES	
File system	myir-image-core	Image built in Yocto without GUI interface	YES
	myir-image-full	A fully functional image built with Yocto	YES
Industry DEMO	Application of Charging pile	Refer to the State grid charging pile program to realize the meter Modbus protocol, IEC104 platform communication protocol and charging demonstration interface. Integrate into the MeasyHMI V2.0 version and demonstrate through full image.	YES
	Engineering Machinery Scenarios	Four AHD cameras capture four images and display them on the screen. The Analog instrument information is displayed on the screen, and the video picture and instrument information are displayed on split screens. Integrate into the MeasyHMI V2.0 version and demonstrate through full image.	YES

*MYC-YM62X Software Features*


**Order Information**

Product Item	Part No.	Packing List
MYC-YM62X System-On-Module	MYC-YM6254-8E2D-140-I	✓ One MYC-YM6254 SOM
	MYC-YM6252-8E1D-140-I	✓ One MYC-YM6252 SOM
	MYC-YM6231-8E1D-100-I	✓ One MYC-YM6231 SOM
MYD-YM62X Development Board	MYD-YM6254-8E2D-140-I	✓ One MYD-YM62X Development Board (MYD-YM6254/MYD-YM6252/MYD-YM6231)
	MYD-YM6252-8E1D-140-I	✓ One USB to TTL cable
	MYD-YM6231-8E1D-100-I	✓ One 12V/2A Power adapter ✓ One DC Power jack adapter ✓ One Quick Start Guide
MY-CAM003M MIPI Camera Module	MY-CAM003M	<b>Add-on Options</b>
MY-LVDS070C 7-inch LCD Module	MY-LVDS070C	✓ MY-LVDS070C 7-inch LCD Module ✓ MY-CAM003M Module

**Note:**

1. One MYD-YM62X Development Board comprises one MYC-YM62X SOM mounted onto the base board. If you require additional SOMs, you may place orders for extras.
2. Bulk discounts are available. For inquiries, please contact MYIR.
3. We cater to custom design requests based on the MYD-YM62X, whether it involves reducing, adding or modifying the existing hardware components to suit the customers' specific needs.


**MYIR Electronics Limited**

Headquarter Address: Room 04, 6th Floor, Building No.2, Fada Road, Yunli Smart Park, Bantian, Longgang District, Shenzhen, Guangdong, China 518129

Factory Address: Room 201, Block C, Shengjianli Industrial Park, Dafu Industrial Zone, Guanlan, Longhua District, Shenzhen, 518110, China

Website: [en.myir.cn](http://en.myir.cn)

Email: [sales@myir.cn](mailto:sales@myir.cn)

Tel: +86-755-22984836