




# MYD-JX8MMA7 Development Board Overview




- ✓ MYC-JX8MMA7 System-On-Module as Controller Board
- ✓ Up to 1.8GHz NXP i.MX 8M Mini Quad ARM Cortex-A53 and 400MHz Cortex-M4 Cores
- ✓ Xilinx XC7A25T Artix-7 FPGA
- ✓ 2GB LPDDR4, 8GB eMMC and 32MB QSPI Flash for ARM, 256MB DDR3 and 32MB QSPI Flash for FPGA
- ✓ 1x Gigabit Ethernet, 1 x 5G Module Interface, 2 x SFP Interfaces, 1x FMC Extension Interface
- ✓ 2 x USB 2.0 Host, 1 x USB 2.0 OTG, 1 x WIFI/BT Module Interface, 2 x Micro SD Slots
- ✓ Supports HDMI and LVDS Display, MIPI CSI and Parallel CSI, Audio Input and Output
- ✓ Supports Working Temperature Ranging from -40 ° C to 85 ° C
- ✓ Supports Running Linux OS

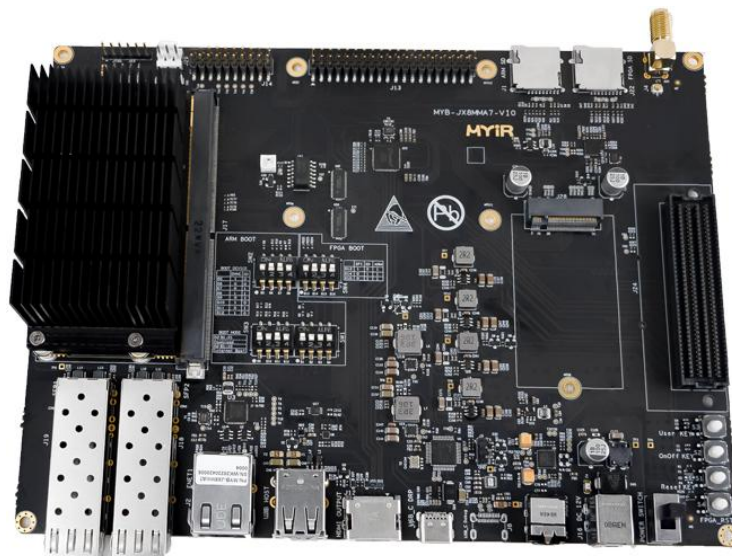


The **MYD-JX8MMA7 Development Board** consists of the high-performance **MYC-JX8MMA7 System-On-Module** and a versatile base board, which is a powerful and interesting design using ARM+FPGA processing architecture. The board adopts NXP's **i.MX 8M Mini** processor which features up to 1.8GHz quad ARM Cortex-A53 and 400MHz Cortex-M4 cores and is used as the main processor to achieve data processing, control, communication and display; while the Xilinx **XC7A25T Artix-7** FPGA is used as the auxiliary processor which is cost and transceiver optimized and used to achieve high-speed data acquisition and processing. The board is a complete evaluation platform suitable for applications with high requirements for data acquisition, multimedia and display, such as high-end medical devices and industrial data acquisition systems.

The **MYC-JX8MMA7 System-On-Module** is an ARM+FPGA SoM integrated with **i.MX8M Mini** ARM processor and **XC7A25T Artix-7** FPGA device. It has 2GB LPDDR4, 8GB eMMC and 32MB QSPI flash for ARM, 256MB DDR3 and 32MB QSPI flash for FPGA, as well as two dedicated PMIC (ROHM BD71847AMWV) respectively for ARM and FPGA. A variety of peripherals and IO signals are available through the 0.05 mm pitch 314-pin MXM 3.0 gold-finger-edge-card connector to make it easy to connect with MYIR's standard base board of **MYD-JX8MMA7 development board** or customized base boards from users. A rich set of peripherals have been brought out through connectors and headers to the MYD-JX8MMA7 base board such as two USB Host and one USB OTG, one Gigabit Ethernet, two SFP module interfaces, one USB 2.0 based M.2 Key B 5G Module interface, one SDIO based WiFi/ Bluetooth interface, two Micro SD slots, HDMI and LVDS display interfaces, MIPI CSI and Parallel CSI interfaces, audio input/output interface, two Micro SD slots, one FMC expansion interface, one Raspberry PI compatible expansion module interface, etc.

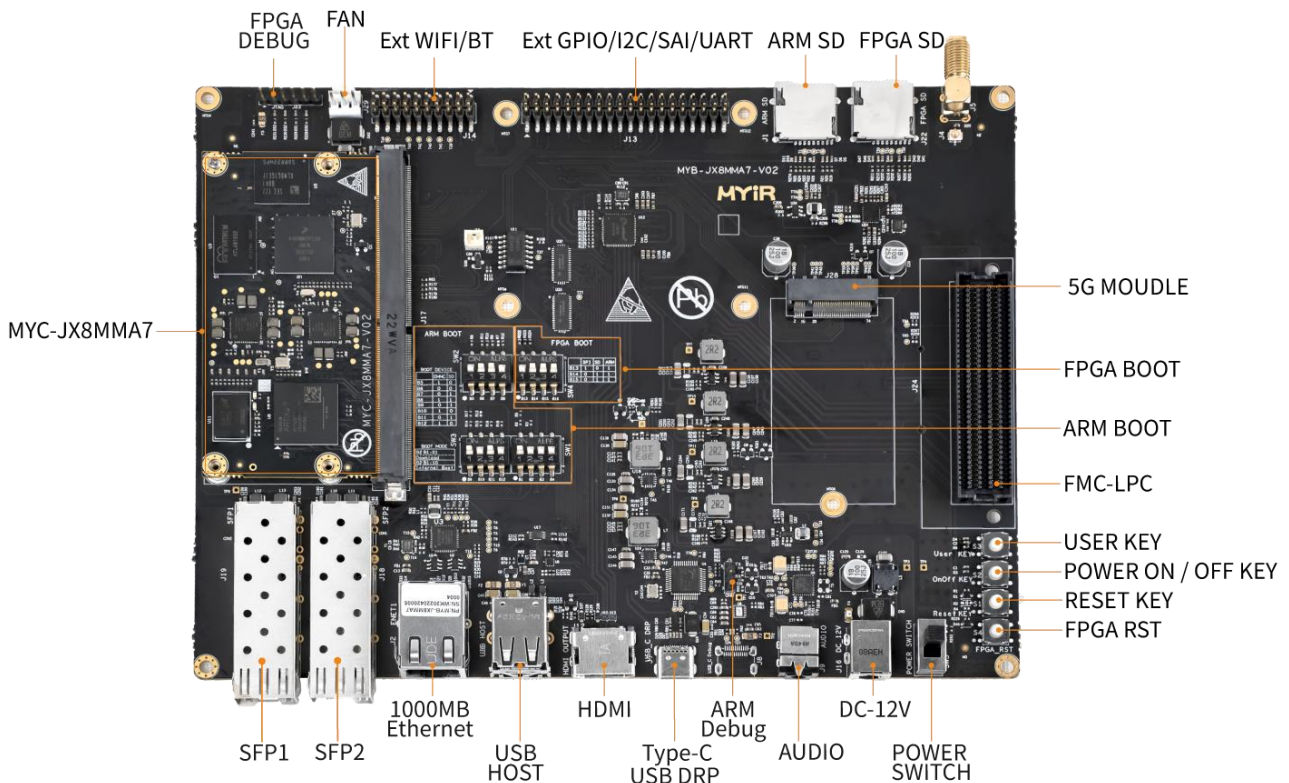

*MYD-JX8MMA7 Development Board Top-view*

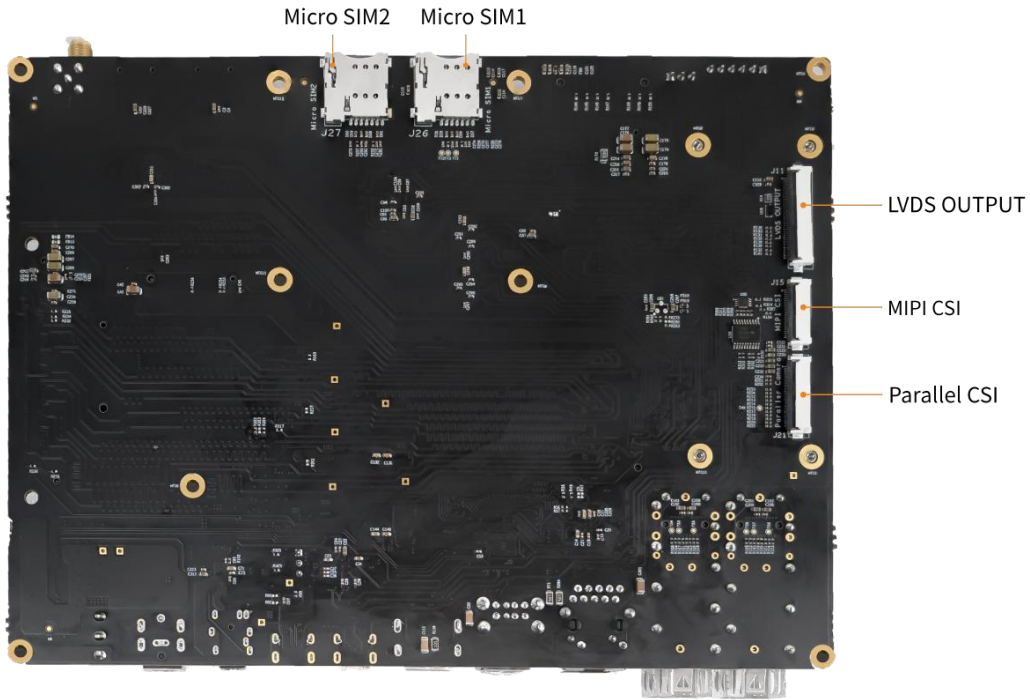

*MYD-JX8MMA7 Development Board Bottom-view*

The **MYD-JX8MMA7** is ready to run Linux OS and provided with abundant software resources and detailed documentations to enable users to start their development rapidly and easily. The board is delivered with necessary cable accessories . MYIR also offers **MY-CAM011B BUS Camera Module**, **MY-CAM003M MIPI Camera Module**, **MY-WIREDCOM RPI Module** (RS232/RS485/CAN), **MY-WF005S WiFi/BT Module** and **MY-LVDS070C LCD Module** as options for the board which have greatly enhanced the functionality of the board.



## Hardware Specification


The **MYC-JX8MMA7 System-On-Module** is using NXP's 14 x 14 mm, 0.5 mm pitch, FCBGA486 package **i.MX 8M Mini** Quad Application Processor (MIMX8MM6DVTLZAA / MIMX8MM6CVTKZAA) and an integrated **Xilinx XC7A25T Artix-7** FPGA.

The i.MX 8M Mini processors used are among the i.MX 8M Mini family (i.MX 8M Mini Quad/QuadLite, i.MX 8M Mini Dual/DualLite, i.MX8M Mini Solo/SoloLite) which represent NXP's latest video and audio experience combining state-of-the-art media-specific features with high-performance processing while optimized for lowest power consumption. With commercial and industrial level qualification and backed by NXP's product longevity program, the i.MX 8M Mini family may be used in any general purpose industrial and IoT application. The main features are as in below table:

Feature	MIMX8MM6CVTKZAA	MIMX8MM6DVTLZAA
<b>Marketing Description</b>	i.MX 8M Mini Quad	i.MX 8M Mini Quad
<b>Core: Number of cores (SPEC)</b>	<b>4</b>	<b>4</b>
<b>Core Type</b>	Arm Cortex-A53	Arm Cortex-A53
<b>Operating Frequency [Max] (MHz)</b>	1600	1800
<b>Co Processor Type</b>	Arm Cortex-M4F	Arm Cortex-M4F
<b>Co Processor Frequency (MAX) (MHz)</b>	400	400
<b>External Memory Supported</b>	DDR3L SDRAM, DDR4 SDRAM, ECC, LPDDR4 DRAM, NAND FLASH, NOR FLASH, QSPI	
<b>L2 Cache (Max) (KB)</b>	512	
<b>Ethernet Type</b>	1 Gbps + IEEE 1588 + AVB	
<b>Serial Communication</b>	3 x SPI, 4 x I <sup>2</sup> C, 4 x UART	
<b>PCIe 2.0</b>	1	
<b>USB Controllers</b>	2	
<b>Video Decode Acceleration</b>	HD1080p60, H.265, H.264, VP8, VP9	
<b>Video Encode Acceleration</b>	HD1080p60, H.264, VP8	
<b>Display</b>	1 x MIPI-DSI	
<b>Camera</b>	1 x MIPI-CSI	
<b>GPU 2D / GPU 3D</b>	1x shader, Vivante GC320, Vivante GCNanoUltra	
<b>Audio Specific Modules</b>	8-ch PDM input, SAI/I2S	
<b>Junction Temperature (Min) (°C)</b>	-40	0
<b>Junction Temperature (Max) (°C)</b>	105	95

*Features of i.MX 8M Mini processor*



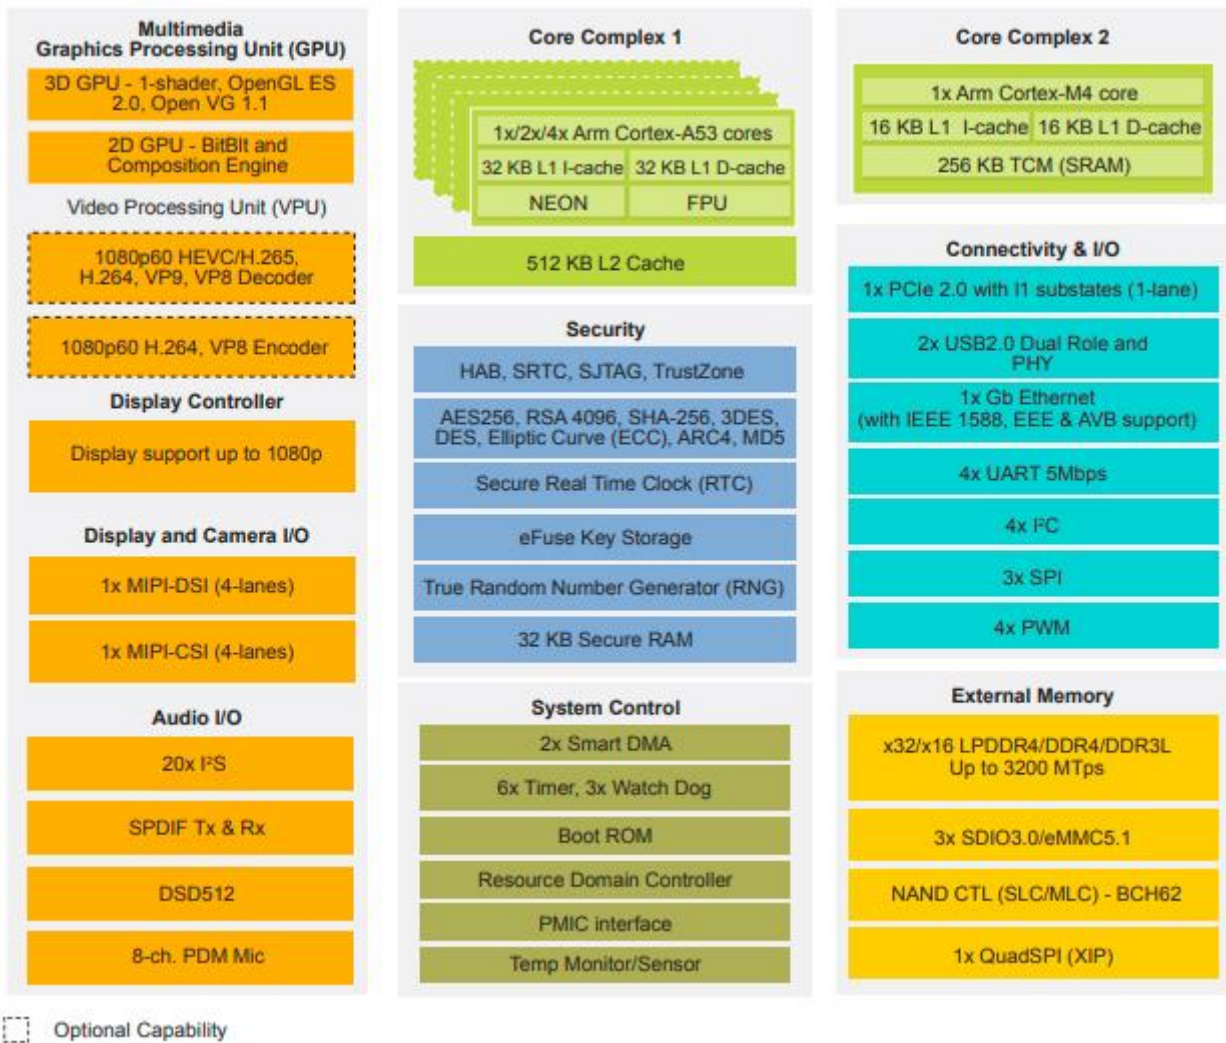

*i.MX 8M Mini Processors Family Block Diagram*

The **Xilinx XC7A25T** devices (XC7A25T-2CSG325C / XC7A25T-2CSG325I) used are among the Artix-7 devices family which provides high performance-per-watt fabric, transceiver line rates, DSP processing, and AMS integration in a cost-optimized FPGA, featuring the MicroBlaze™ soft processor and 1,066Mb/s DDR3 support, and is the best value for a variety of cost and power-sensitive applications including software-defined radio, machine vision cameras, and low-end wireless backhaul. The main features are as in below table:



Artix-7 XC7A25T-2CSG325	Parameter
Logic Cells	23,360
Slices	3,650
CLB Flip-Flops	29,200
Maximum Distributed RAM (Kb)	313
Block RAM/FIFO w/ ECC (36 Kb each)	45
Total Block RAM (Kb)	1,620
CMTs (1 MMCM + 1 PLL)	3
Maximum Single-Ended I/O	150
Maximum Differential I/O Pairs	72
DSP Slices	80
Analog Mixed Signal (AMS) / XADC	1
Configuration AES / HMAC Blocks	1
GTP Transceivers (6.6 Gb/s Max Rate)	4
Temperature Grade	XC7A25T-2CSG325C (-2 speed grade, 0°C to +85°C) XC7A25T-2CSG325I (-2 speed grade, -40°C to +100°C)


*Features of Artix-7 XC7A25T FPGA*

The MYD-JX8MMA7 Development Board is using MYC-JX8MMA7 SOM as core controller board. It takes full features of i.MX 8M Mini processor and Artix-7 XC7A25T FPGA, the main features are characterized as below:


**Mechanical Parameters**

- Dimensions: 200mm x 150mm (base board), 82mm x 45mm (SOM)
- PCB Layers: 6-layer design (base board), 10-layer design (SOM)
- Power supply: +12V/2A (base board), 5V/2A (SOM)
- Working temperature: 0~70 Celsius (commercial grade) or -40~85 Celsius (industrial grade)

**The MYD-JX8MMA7 Controller Board (MYC-JX8MMA7 System-On-Module)**

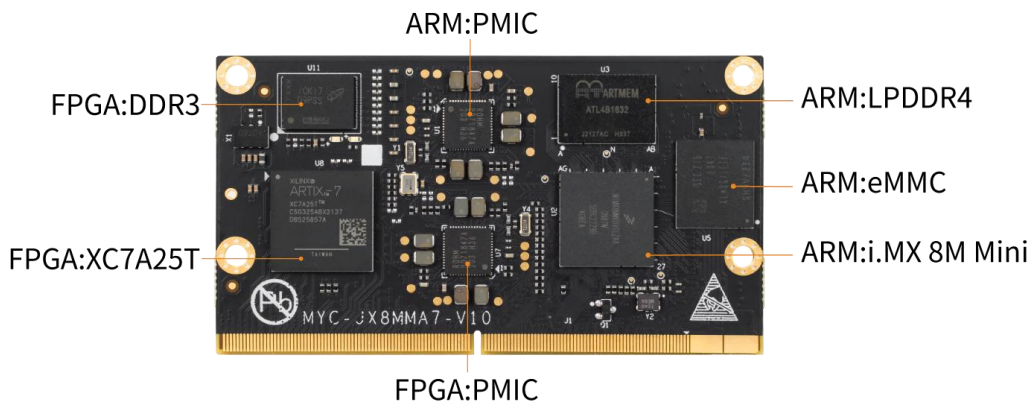

*MYC-JX8MMA7 Top-view*

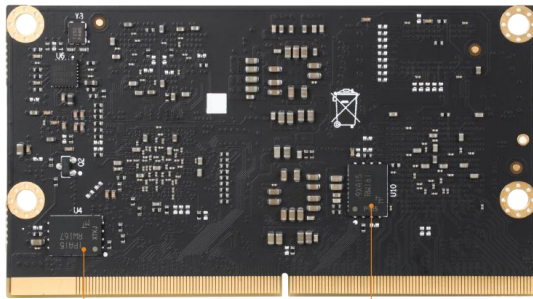

ARM:QSPI Flash

FPGA:QSPI Flash

MYC-JX8MMA7 Bottom-view

**Processor**

- NXP i.MX 8M Mini Processor
  - Up to 1.8 GHz Quad-core ARM Cortex-A53 CPU
  - 400MHz Real-time Cortex-M4 co-processor
  - Integrated 2D/3D GPU and 1080p VPU
- Xilinx Artix-7 XC7A25T-2CSG325 FPGA

**Memory**

- ARM: 2GB LPDDR4, 8GB eMMC, 32MB QSPI Flash
- FPGA: 256MB DDR3, 32MB QSPI Flash

**Power Management IC**

- Two PMIC (ROHM BD71847AMWV, one for ARM and one for FPGA)

**Peripherals and Signals Routed to Pins**

- 0.5mm pitch 314-pin MXM 3.0 Gold-finger-edge-card Connector

Item	Features
<b>ARM</b>	
Ethernet	1*RGMII
USB2.0	2* USB2.0
Camera	1* MIPI CSI
SDIO	2*SDIO
UART	4*UART
I2C	2*I2C
SPI	3*SPI
Display Output	1*MIPI-DSI
Audio	3* I2S
<p><i>Note: the peripheral signals brought out to the expansion interface are listed in maximum number. Some signals are reused. Please refer to the processor datasheet and the CPU Module pinout description file.</i></p>	


Item	Features
<b>FPGA</b>	
GTP	3
Logic Cells	23,360
Slices	3,650
CLB Flip-Flops	29,200
DSP Slices	80

Peripherals and Signals Routed to 314-pin Expansion Connector




**The MYD-JX8MMA7 Development Board Base Board**

- 1 x Power Jack
- 1 x Power Switch
- 2 x Micro SD Slot (one for ARM and one for FPGA)
- 1 x ARM Debug Serial Port, 1 x FPGA Debug Interface
- 2 x USB 2.0 HOST Port (Type-A), 1 x USB 2.0 OTG Port (Type-C)
- 1 x 10/100/1000 Mbps Ethernet Interface (RJ45)
- 1 x WIFI/BT Module Interface  
(2.54mm 2 x 10-pin male header, supports MYIR's MY-WF005S WIFI/Bluetooth module)
- 1 x 5G Module Interface of USB2.0 protocol M.2 B Type Socket
- 2 x SFP Optical Module Interfaces
- 1 x FMC expansion interface
- 1 x LVDS Display Interface
- 1 x HDMI Display Interface
- 1 x MIPI CSI Interface (supports MYIR's MY-CAM003M Camera Module)
- 1 x Parallel CSI Interface (supports MYIR's MY-CAM011B Camera Module)
- 1 x Audio Input/Output Interface
- 1 x 2.54mm pitch 2\*20-pin male expansion header (GPIO/I2C/SAI/UART, compatible with Raspberry PI standard 40-pin extension interface, supports MYIR's MY-WIREDCOM RPI Module)
- 4 x Buttons (two for Reset, one for Power On/Off, one for User)

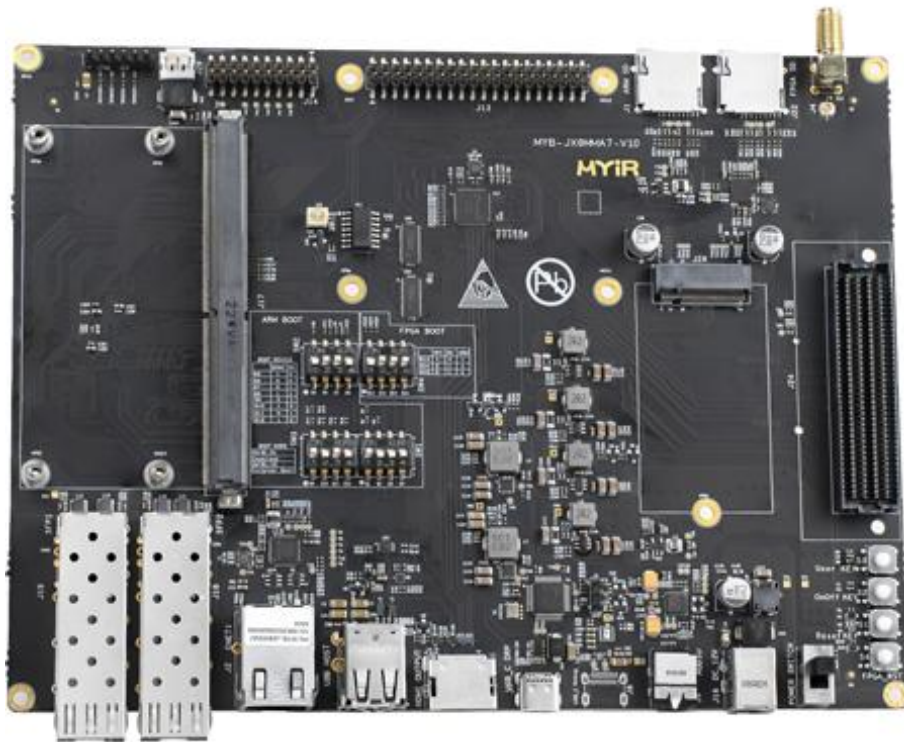


*MYD-JX8MMA7 Development Board Base Board*




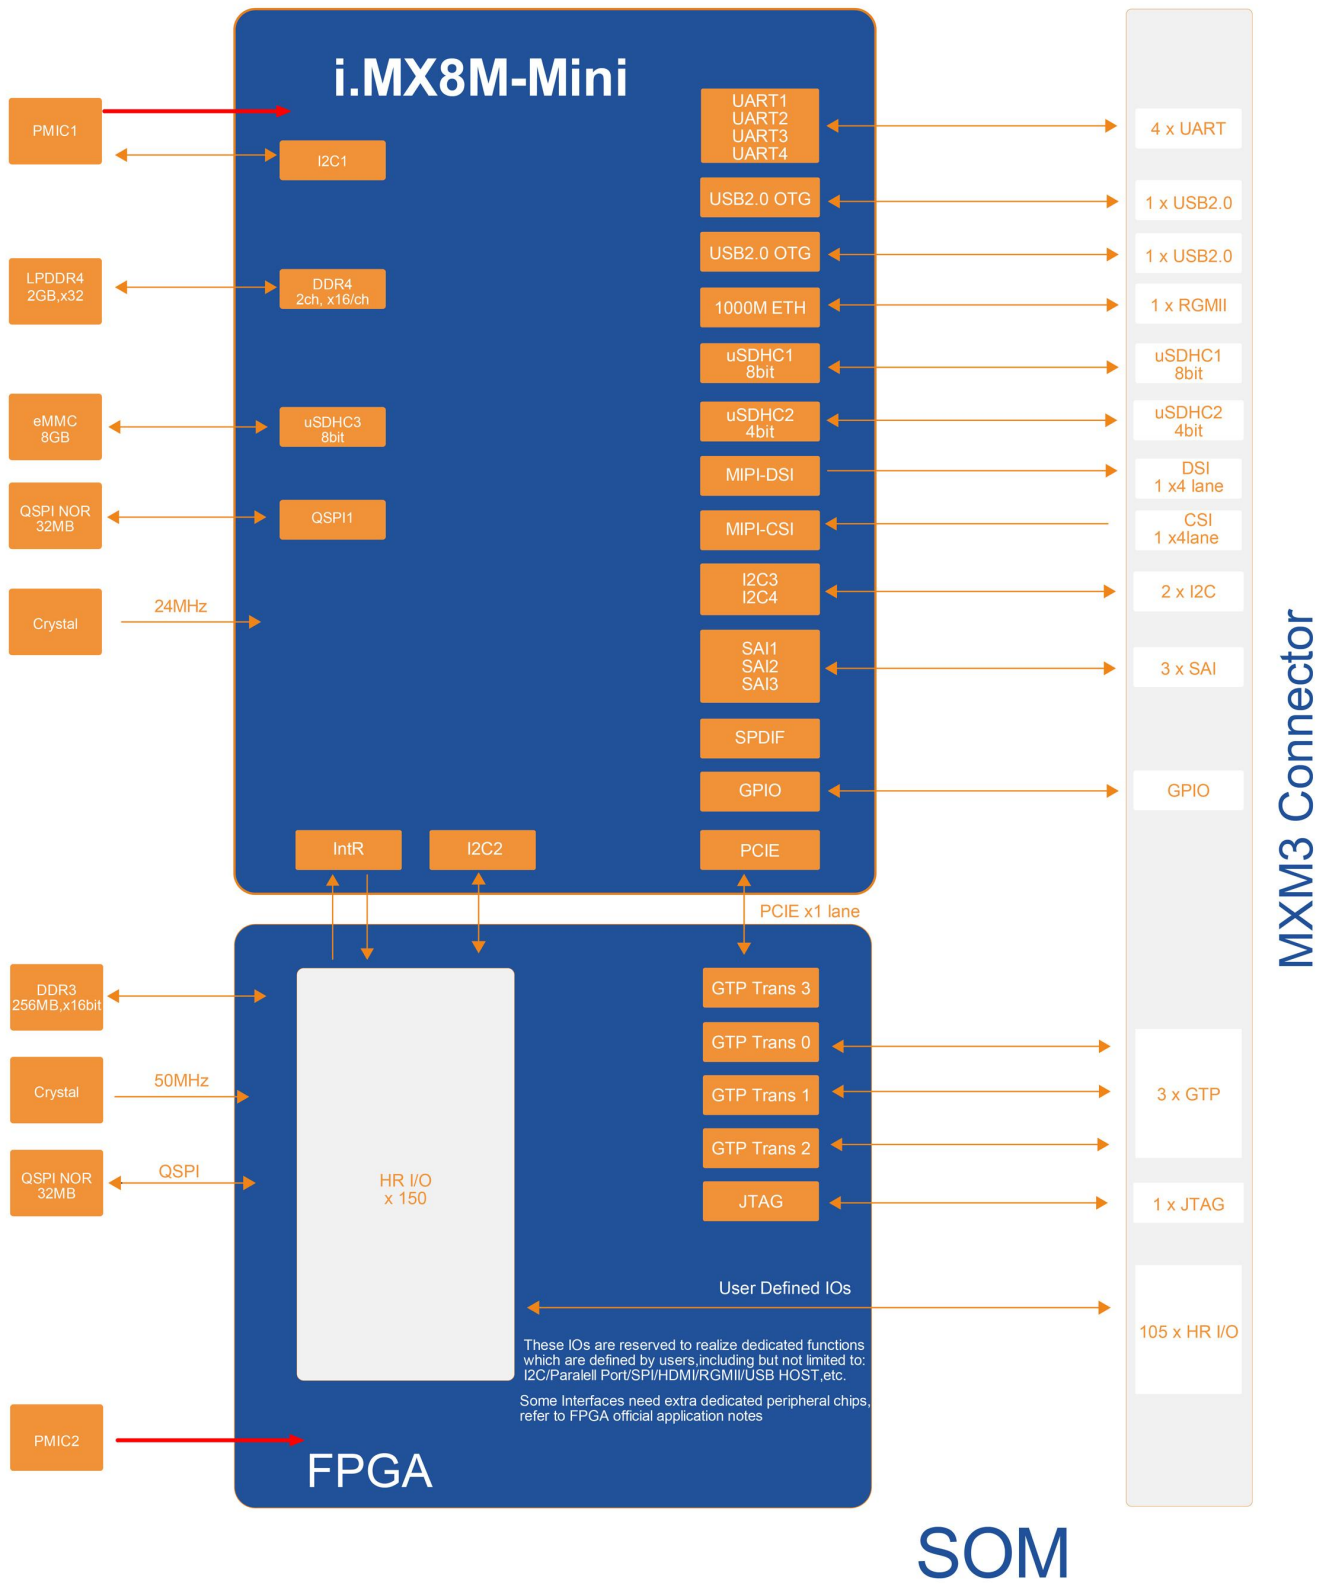


MYC-JX8MMA7 Function Block Diagram

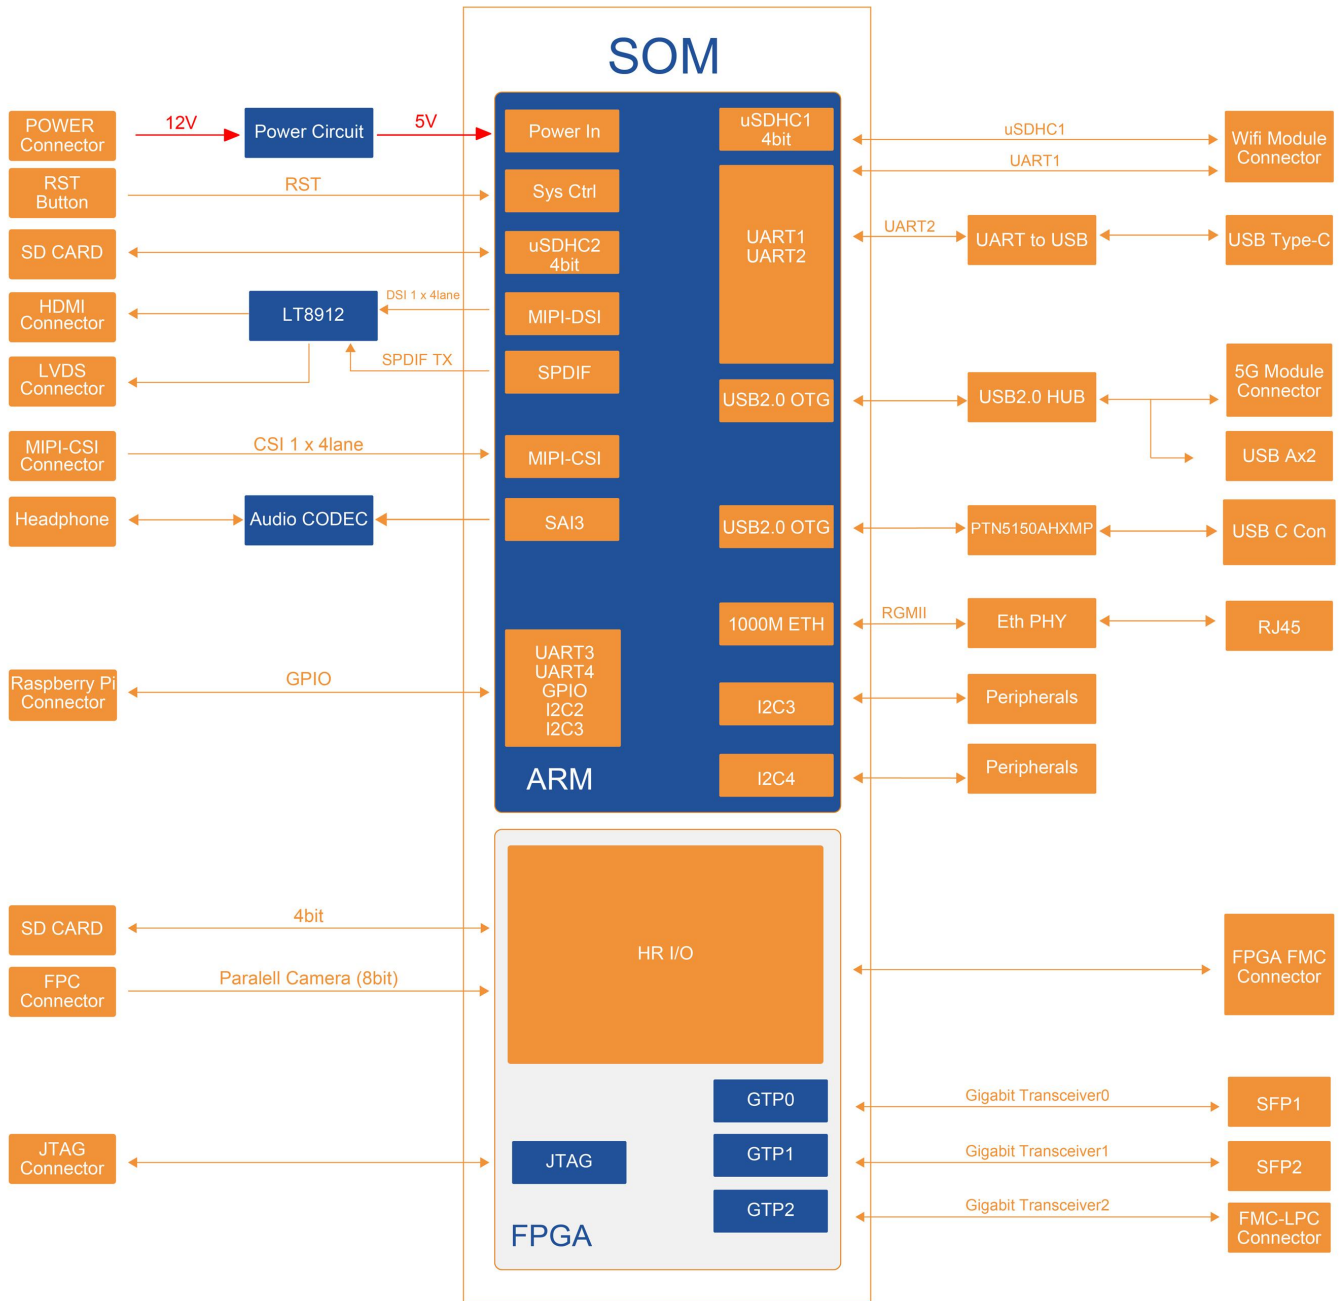

MYD-JX8MMA7 Development Board Function Block Diagram

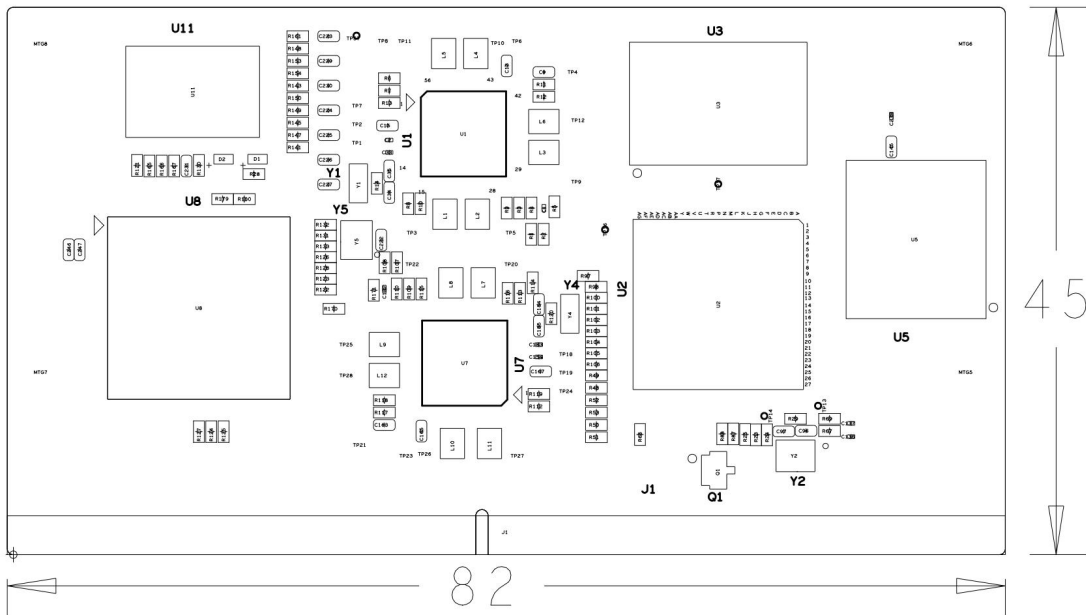

MYC-JX8MMA7 Dimensions Chart

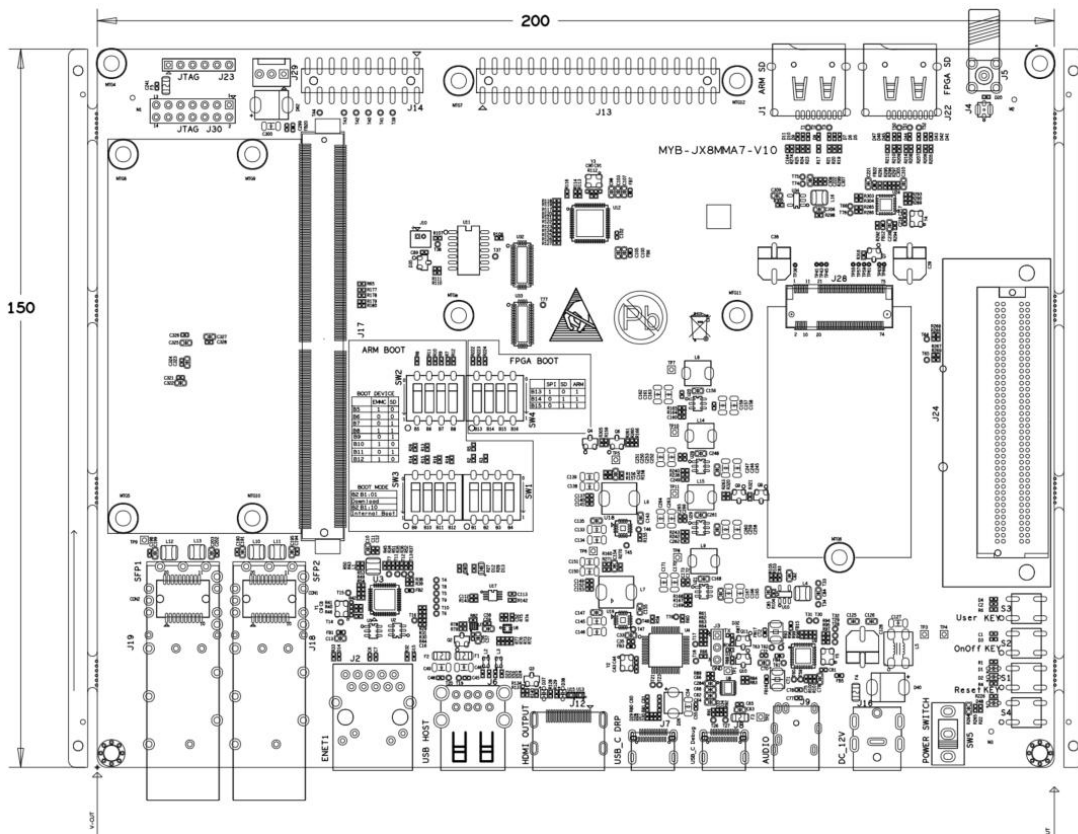

MYD-JX8MMA7 Development Board Dimensions Chart



## Software Features

The MYD-JX8MMA7 development board supports Linux OS and comes with software packages. The kernel and many peripheral drivers are available in source code to assist clients expedite their development. The following are a summary of the software features:

Item	Features	Description	Source Code Provided
Bootloader	U-boot	Boot program U-boot 2021.04	YES
Linux kernel	Image	Customized based on official kernel_5.10.72	YES
Drivers	MMC	eSDHC driver	YES
	SPI	SPI driver	YES
	I2C	I2C driver	YES
	Ethernet	Gigabit Ethernet driver	YES
	USB Host	USB driver	YES
	USB OTG	USB driver	YES
	UART	UART driver	YES
	GPIO key	Key driver	YES
	WiFi & BT	Brcm driver	YES
	RTC	RTC driver	YES
	GPIO Led	Led driver	YES
	MIPI DSI	MIPI driver	YES
	CSI	CSI driver	YES
Touch	Touch screen driver	YES	
File System	myir-image-full	File system with GUI interface built on Yocto	YES
	myir-image-core	File system without QT built on Yocto	YES

### *Linux Software Features*




**Order Information**

Product Item	Part No.	Packing List
MYD-JX8MMA7 Development Board	MYD-JX8MMA7-8E2D-32Q256D-180-C	<ul style="list-style-type: none"> <li>✓ One MYD-JX8MMA7 Development Board (including MYC-JX8MMA7 SOM)</li> <li>✓ One USB TYPE-A to TYPE-C cable</li> <li>✓ One 12V/2A Power adapter</li> <li>✓ One DC Power jack adapter</li> <li>✓ One Quick Start Guide</li> </ul>
	MYD-JX8MMA7-8E2D-32Q256D-160-I	
MYC-JX8MMA7 System-On-Module	MYC-JX8MMA7-8E2D-32Q256D-180-C	<b>Add-on Options</b> <ul style="list-style-type: none"> <li>✓ MYC-JX8MMA7 System-On-Module</li> <li>✓ MY-CAM011B DVP Camera Module</li> <li>✓ MY-CAM003M MIPI Camera Module</li> <li>✓ MY-LVDS070C 7 inch LCD Module</li> <li>✓ MY-WIREDCOM RPI Module</li> <li>✓ MY-WF005S WiFi/BT Module</li> </ul>
	MYC-JX8MMA7-8E2D-32Q256D-160-I	
MY-CAM011B Camera Module	MY-CAM011B	
MY-CAM003M Camera Module	MY-CAM003M	
MY-LVDS070C 7 inch LCD Module	MY-LVDS070C	
MY-WIREDCOM RPI Module	MY-WIREDCOM	
MY-WF005S WiFi/BT Module	MY-WF005S	


**MYIR Electronics Limited**

Headquarter Address: Room 04, 6th Floor, Building No.2, Fada Road, Yunli Smart Park, Bantian, Longgang District, Shenzhen, Guangdong, China 518129

Factory Address: Room 201, Block C, Shengjianli Industrial Park, Dafu Industrial Zone, Guanlan, Longhua District, Shenzhen, 518110, China

Website: [en.myir.cn](http://en.myir.cn)

Email: [sales@myir.cn](mailto:sales@myir.cn)

Tel: +86-755-22984836